

## INSTALLATION INSTRUCTIONS - EFFISUS EVERYDAYSEAL XTRA

### Substrate Preparation


1



All substrates should be dry. Please clean all non-absorptive, smooth substrates using the Effisus Setup PR Cleaner. Remove any loose material from absorptive, porous substrates, such as concrete, and subcoat these substrates with the Effisus Coat EP Primer. Allow the primer to flash off. Bonding operations can not be carried out at temperatures below -29°C. For temperatures between 4.5°C and -29°C always subcoat the substrates with Effisus Coat EP Primer.

### Connecting Operations

2

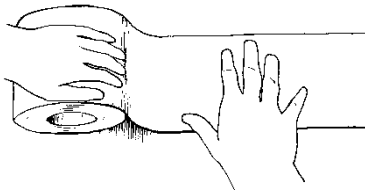


There must be no less than 2.5cm of Effisus EverydaySeal XTRA Membrane on each side of a joint.

Install Effisus EverydaySeal XTRA Membrane over the repair area, removing the release liner gradually to prevent contamination of the adhesive prior to application. Roll with pressure using a steel roller to activate bonding process.

Apply gently and without tension.

### Overlaps

3

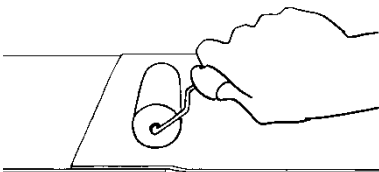


Seams between Effisus EverydaySeal XTRA Membranes should have a minimum overlap of 100mm.

Adhere the top Effisus EverydaySeal XTRA Membrane over the bottom Effisus EverydaySeal XTRA Membrane. Roll with pressure using a steel roller to activate bonding process.

### Corners and Other Details

4



Pay attention not to stretch the Effisus EverydaySeal XTRA Membrane and lay it in gently.

Effisus EverydaySeal XTRA Membrane has no memory. So, it requires less expertise to use in these situations.

Effisus EverydaySeal XTRA Membrane perimeter, inner and outer corners, and other details, can be sealed with the Effisus Block EK Sealant.