

Effisus Breather FR UV

1. Summary

Effisus Breather FR UV Membrane is a non-combustible waterproofing, airtight and vapour permeable membrane, made of a fiberglass fabric and a black special coating.

Effisus Breather FR UV membrane has exceptional UV resistance ideal for perforated and open joints rainscreen cladding systems. It is suitable for application on façades with 100% permanent exposure.

Protects the building against driving rain, moisture improving facade resistance to fire and preventing future corrosion and insulation deterioration. Increases the building energy efficiency.

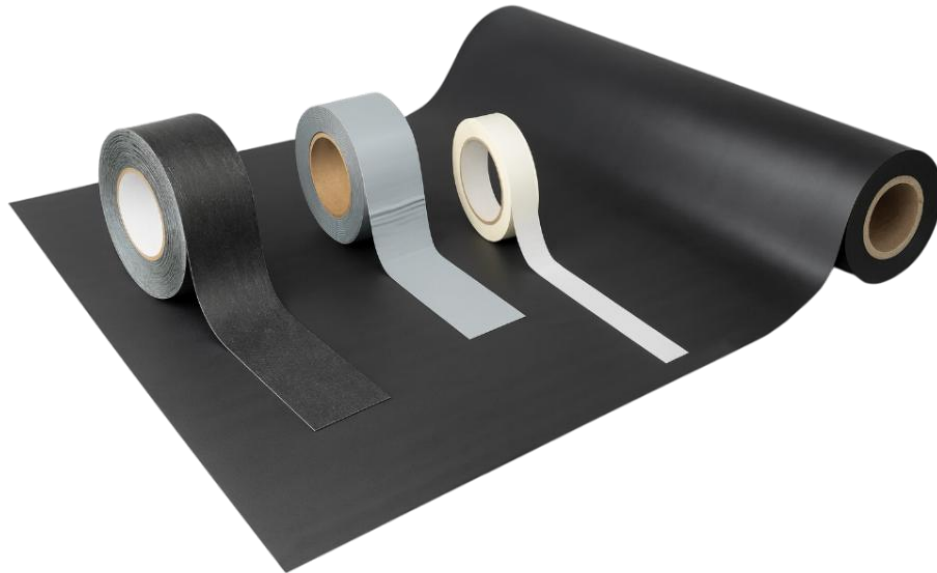


Figure 1 - Effisus Breather FR UV System.

2. Scope of Usage

In General: Wall lining membrane.

3. Presentation and Product Details

3.1 Effisus Breather FR UV Membrane

Standard roll width: 1.50m

Roll length: 50m

Thickness: 0.23mm

Colour: Black

Characteristics: see the table below.

Technical Data	Standard	Result
Thickness	EN ISO 12572	0,230mm +- 0,020mm
Length	-	50 m
Width	-	1,50 m
Reaction to Fire - System	EN 13501-1 ^{a)}	A2-s1,d0
Reaction to Fire - Membrane	EN 13501-1	Class A1
Resistance to water penetration	EN 13111	W2, pass
Density of vapour flow rate, g (kg/(m ² .s))	EN ISO 12572	2,2542x10 ⁻⁶
Water vapour transmission properties (Sd-value)	EN ISO 12572	0,094
Tensile Strength MD/CD (N/50mm)	EN 12311-1	4240 (min: 3840 ; max: 4620) / 3110 (min: 2735 ; max: 3485)
Elongation at Break MD/CD (%)	EN 12311-1	6,2 (min: 4,2; max: 8,2) / 5,2 (min: 3,1; max: 7,3)
Nail tear resistance MD/CD (N)	EN 12310-1	295 (min: 220; max: 370) / 385 (min: 320 ; max: 450)
Flexibility at low temperature (- 40 °C)	EN 1109	No cracks
Artificial ageing by long term exposure to the combination of UV radiation and elevated temperature and heat	Elongation ^{b)} (%)	6,2 (min: 4,2; max: 8,2) / 5,2 (min: 3,1; max: 7,3)
	Tensile Strength ^{b)} (N/50mm)	4240 (min: 3840 ; max: 4620) / 3110 (min: 2735 ; max: 3485)
	Resistance to water penetration ^{c)}	W2, pass
UV resistance	-	100% exposure
Temperature service range	-	-40°C to 100°C ^{d)}

a) The fire classification was obtained with Effisus accessories (double side adhesive tapes) tested as a system.

b) In accordance with Annex C of EN 13859-2 (EN 12311-1).

c) In accordance with Annex C of EN 13859-2 (EN 1928/EN 13111).

d) For application below -20°C, please contact Effisus Technical Department for further assessment.

4. Accessories

The Effisus Breather FR UV System includes accessories that are designed specifically to simplify the application of the membrane.

4.1 Adhesive Tapes

Adhesive tape for moisture proof sealing of Effisus Breather FR UV Membrane overlap, perimeter and perforations sealing. These tapes are suitable for bonding Effisus Breather FR UV Membrane to smooth, non-porous and porous substrates.

4.1.1 Effisus 2Adjoin DF Tape (fixing to structure / membrane overlaps)

Effisus 2Adjoin DF is a double-sided, airtight, water and moisture-resistant sealing tape, suitable for fixing Effisus membranes, PE/PA/PP and aluminium foils to metal studs. It is suitable for windtight and water/moisture-proof sealing of external membranes, as well as for rain-proof taping of roof underlay. It is quick and easy to apply using the Effisus 2Adjoin DF Hand Dispenser.



Compatible substrates

Designed for fixing internal membranes to metal sections in dry construction and the fixture of external membranes to hard-based panels (OSB, plywood panels, sheathing boards, gypsum board or the like), hard plastics and window frames.

All other materials in contact with Effisus products should be submitted for further technical evaluation and compatibility.

Roll width: 25mm.

Roll length: 20m.

Colour: Colourless with a polypropylene reinforcement.

4.1.2 Effisus 2Bond DS Tape (sealing membrane edges)

Effisus 2Bond DS is the most efficient solution for sealing two surfaces of the same or different materials, and for sealing any nail/screw penetrations. Effisus 2Bond DS tape is a double-sided adhesive tape, devised using advanced technology with active adhesive sealants.



Designed using a chemical arrangement of thermoplastics and non-curing rubber (non-butyl) with an incorporated primer, Effisus 2Bond DS is thoroughly elastic and flexible within a temperature range of 93°C to -57°C.

With a highly advanced micro sealant and removable siliconized release liner on each side, 2Bond DS Tape is designed to seal Effisus Breather FR UV onto building perimeters and connections to porous surfaces, creating a tight, permanent and waterproof membrane. It is quick and easy to apply on smooth surfaces using Effisus Setup PR Cleaner or any non-residue cleaner.

Compatible substrates

2Bond DS is fit for use on a wide range of construction substrates, both porous and non-porous, including concrete, cement particle sheathing boards, glass fibre and gypsum, masonry, brick, ceramic, metal, galvanized steel, coated and non-coated aluminium, polycarbonate, glass, natural stone, gypsum and OSB boards, wood, fiberglass, EPDM, SBS, modified APP, PP, PE and polystyrene etc. Connections with other non-proprietary membranes (Breather, EPDM, etc.) should be adequately designed to ensure optimum compatibility. All other materials in contact with Effisus products should be submitted for further technical evaluation and tested for compatibility.

Roll width: 25mm or 50 mm.

Roll length: 15.25m.

Colour: Grey.

4.1.3 Effisus Adjoin TI Tape (sealing perforations)

Effisus Adjoin TI Tape is a flexible multi-purpose adhesive tape for airtight bonds, indoors and outdoors, in accordance with DIN 4108, SAI 180 and ÖNorm B8110-2. It is used to seal service penetrations and cladding fixing elements.



Suitable for windows, doors, planed timber, corners and roof windows. Offers high protection against piercing in corners due to its high elasticity.
With release paper.

Roll width: 60mm.
Roll length: 30m.
Colour: Black.

4.2 Accessories: Others

4.2.1 Effisus Coat NP Prime

Primer to prepare surfaces before bonding Effisus Breather FR UV membrane.

The primer should be used for surface treatment before applying Effisus 2Bond DS tape:

- when applying on moist porous substrates;
- within a temperature range of -10 °C to 5 °C.

Package: 4.5 Kg



4.2.2 Effisus Cleaner LV

Effisus Cleaner LV is a ready-to-use solvent-based cleaning liquid and is used for cleaning and degreasing surfaces. It is compatible with all the products that constitute the Effisus waterproofing system.



5. Production, marketing and technical solution

Effisus supplies Effisus Breather FR UV Membranes and accessories.

Testing of all our manufactured goods is carried out and continuously recorded under industry-standard laboratory conditions, with the additional guarantee of periodic external inspections.

6. Installation Instructions

6.1 General Guidelines

It is the end user's responsibility to ensure the quality of installation by following the installation instructions in this document and by periodically checking the installed materials.
Effisus is always available, upon request, to train working staff.

6.1.1 Storage

Effisus Breather FR UV Membrane and system accessories should be stored on a hard, clean and dedicated stand, in a place that can protect them from extreme weather conditions or the risk of puncture. Materials should be kept within a temperature range of 5°C to 20°C.

Rolls should be stored flat on their sides, on a smooth, clean, dry surface, under cover, protected from sunlight and extreme weather conditions or the risk of puncture.

6.1.2 Installation Conditions

- Effisus Breather FR UV Membrane should be carefully transported and applied, to avoid sharp substrate edges, dust and debris contamination and the risk of tearing or loss of integrity.
- Bonding should be carried out on clean, dry, grease and dust-free supports.
- Surface preparation: before applying any Effisus Breather FR UV System accessories, surfaces must be thoroughly cleaned using Effisus Cleaner LV. The substrate should also be degreased completely. A primer should be used for surface preparation and treatment of porous surfaces, or application within a temperature range of 5°C - 10°C to improve surface adhesion of the Effisus membrane system. Allow the primer to dry to the touch (no material transfer). Dry time will vary depending on ambient temperature and humidity (typically less than 20 minutes).
- Effisus Breather FR UV Membrane should always be applied to a high density, rigid substrate or mineral wool (or similar), minimizing insufficient cohesion to the substrate.
- Effisus Breather FR UV Membrane should not be tensioned.
- Effisus Breather FR UV Membrane should be applied using the accessories recommended in this document.
- In case of precipitation (rain, snow, dense fog or any risk of condensation), application of the adhesive/sealant must be suspended.
- After installation, the Effisus Breather FR UV Membrane should not have any loose ends exposed to wind or work done by other contractors, and should be protected with protective boards, insulation or metallic sheeting.
- All other materials in contact with Effisus products should be submitted for further technical evaluation and tested for compatibility.

6.2 Effisus Breather FR UV Membrane Fixing



Figure 2 - Effisus Breather FR UV System.

6.2.1 Fixing membrane to the substrate

6.2.1.2 Effisus 2Adjoin DF Tape

Effisus Breather FR UV membrane should be applied to the sheathing board using a 25mm-wide band of Effisus 2Adjoin DF Tape, with a maximum spacing of 500mm//500mm.

If the membrane is applied on the sheathing board, the Effisus Breather FR UV membrane does not need to be mechanically fixed.

For more information on this accessory and its compatibility with other materials, see 4.1.

Note: When applying the membrane in front of the insulation, the Effisus 2Adjoin DF Tape has

the function of temporarily secure the Effisus Breather FR UV membrane until it is mechanically fixed.

6.2.1.2 Effisus 2Bond DS Tape (Alternative)

The Effisus Breather FR UV membrane should be fixed using a 25mm-wide band of Effisus 2Bond DS Tape, with a maximum spacing of 500mm//500mm.

For more information on this accessory and its compatibility with other materials, see 4.1.

6.2.2 Overlapping Joints

Upper layers should always overlap lower layers to facilitate the runoff of rainwater and to avoid water accumulation at the overlap joints.

- Horizontal joints should overlap by 100mm minimum.
- Vertical joints should overlap by 150mm minimum and be staggered or offset wherever possible (see Figure 3).

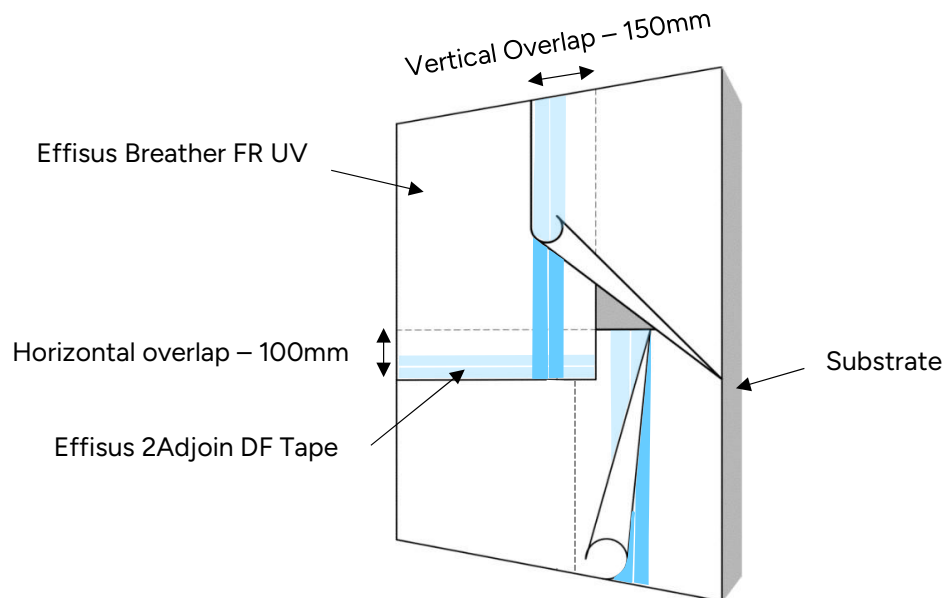


Figure 3 - Effisus Breather FR UV Membrane – Overlapping Joints.

6.2.2.1 Effisus 2Adjoin DF Tape

Joints should be sealed with 2 bands 25mm-wide of Effisus 2Adjoin DF Tape.

6.2.2.2 Effisus 2Bond DS Tape (Alternative)

Joints should be sealed with 2 bands 25mm-wide of Effisus 2Bond DS Tape.

6.2.3 Perimeter sealing

6.2.3.1 Effisus 2Bond DS Tape

Effisus Breather FR UV Membrane should be sealed continuously around the membrane perimeter and in all locations interrupting the continuity of the membrane, such as window frames, doors, perforations or similar, using a 25 mm-wide band of Effisus 2Bond DS Tape.

If there is any risk of sliding or stress to the membrane, this should be mechanically fixed around its edges.

For more information about this accessory and its compatibility with other materials see 4.1.

6.2.4 Perforations sealing

6.2.4.1 Effisus 2Bond DS Tape

All nail/screw perforations <25mm in diameter should be sealed with a 50mm x 50mm patch of Effisus2Bond DS Tape, a double-sided adhesive/sealant tape (thickness > 1,50mm). Irregularly shaped facade

perforations over 25mm in diameter should be studied in detail on a case-by-case basis by the Effisus Technical Department.

To seal cables, pipes and other perforations, Effisus has a variety of solutions that can be used to seal them. For projects with high requirements or unusual shapes, Effisus developed customized solutions capable of accommodating the most difficult perforations in any type of project.

Note: For more information about this Effisus Solutions please contact Effisus Technical Department.

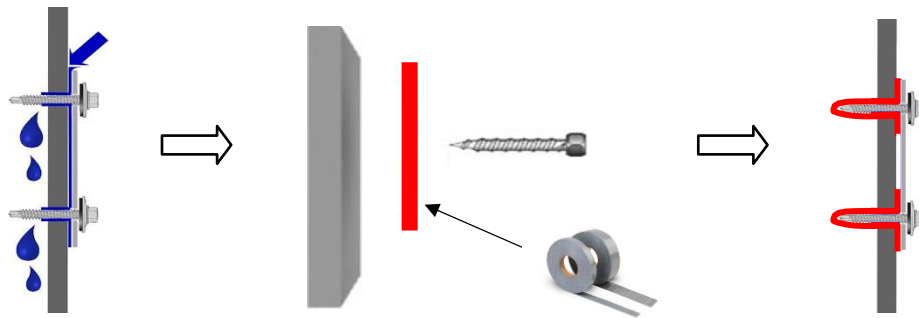


Figure 4 - Nails/screw perforations membrane sealing.

6.2.4.2 Effisus Adjoin TI Tape

To seal service penetrations and cladding fixing elements it should be used Effisus Adjoin TI tape. The application of the Effisus Adjoin TI tape should follow the recommendations below on Figure 5.

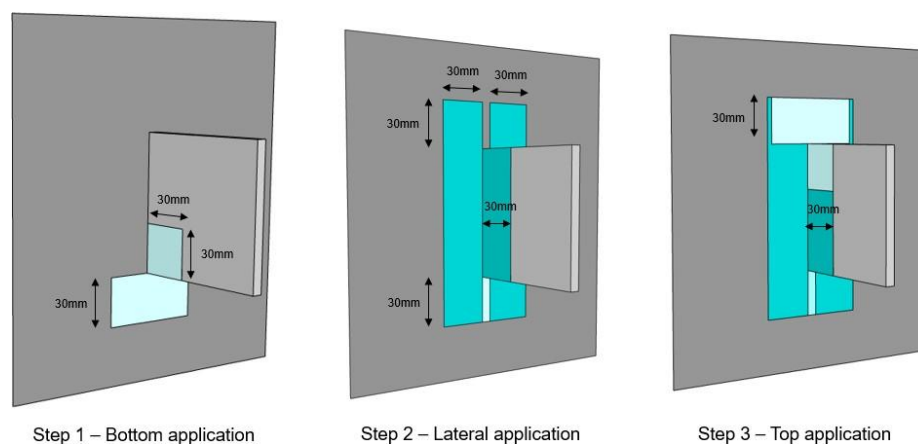


Figure 5 – Sealing service penetrations and cladding fixing perforations.

6.2.5 Bond between Effisus Breather FR UV Membrane – Effisus ProFlex FR Membrane

Bonds between an Effisus Breather FR UV Membrane and an Effisus ProFlex FR Membrane should be made using a 25 mm-wide band of Effisus 2Bond DS Tape, or an 8mm-diameter bead of EffisusBonding KF/KFP paste adhesive.

6.2.6 Bond between Effisus Breather FR UV membrane – Effisus Vapour FR membrane

Bonds between an Effisus Breather FR UV and an Effisus Vapour FR Membrane should be made using 2bands 25 mm-wide of Effisus 2Adjoin DF Tape or 2 bands 25 mm-wide of Effisus 2Bond DS Tape.

7. Repairs

In case of puncture to the membrane, sealing of the damaged area is essential, using a patch of EffisusBreather FR UV Membrane with a compatible sealant accessory.

This patch should be at least a distance of 100mm in every direction from the location of the damagedEffisus Breather FR UV Membrane.

Effisus 2Bond DS Tape should be applied at a distance of $\approx 50\text{mm}$ to 25mm from the patch edges.

The repairing patch of Effisus Breather FR UV should be adhered/sealed to the membrane using 2 bands 25 mm wide of Effisus 2Bond DS Tape, see Figure 5.

- Cut a Patch of Effisus Breather FR UV at least 100mm larger than the tear to the Effisus Breather FR UV (in every direction).
- Apply 2 bands 25 mm-wide of Effisus 2Bond DS Tape to the Effisus Breather FR UV membrane $\approx 50\text{mm}$ and 25mm from the membrane edge.

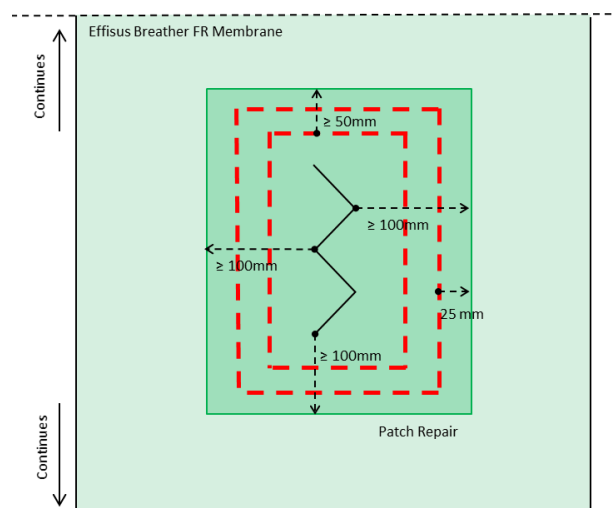


Figure 6 - Effisus Breather FR UV Membrane - Repair

Legend:

- Tear on Effisus Breather FR UV Membrane
- Effisus Breather FR UV Membrane
- Patch Repair - Effisus Breather FR UV Membrane
- Effisus 2Bond DS Tape, 25mm width

8. Compatibility

Effisus Breather FR UV Membranes are compatible with all traditional building materials. However, if in doubt, carry out a compatibility test and consult Effisus Technical Department.

Whenever Effisus Breather FR UV Membranes are to be used in vigorous work environments (workshops, laboratories, etc.) Effisus Technical Department must be consulted.

9. Accessories Consumption

Accessories Consumption				
Product	Colour	Delivery	Consumption	Storage
Effisus Coat NP Primer	Black	4,5kg Can	At 5cm Application width: 10-15g/m, depending on substrate.	Storage
Effisus Cleaner LV	Clear	1l Can	35m ² /litre	Cool, dry, frost-proof, protect from direct sunlight. Keep container tightly closed.

10. Test Results and Certification

Technical details are presented in this document. Effisus Breather FR UV obtained class A2, s1-d0 rating as a System according to the Standard EN13501, and Class A (or class 1) on ASTM E84.

The Effisus Breather FR UV membrane has CE certification and DoP based on EN 13859:2, Flexible sheets for waterproofing. Definitions and characteristics of underlays. Underlays for walls (EN 1928, EN 13111, EN ISO 12572, EN 12311-1, EN 12310-1, EN 1109 and artificial ageing).

For further information contact Effisus.